
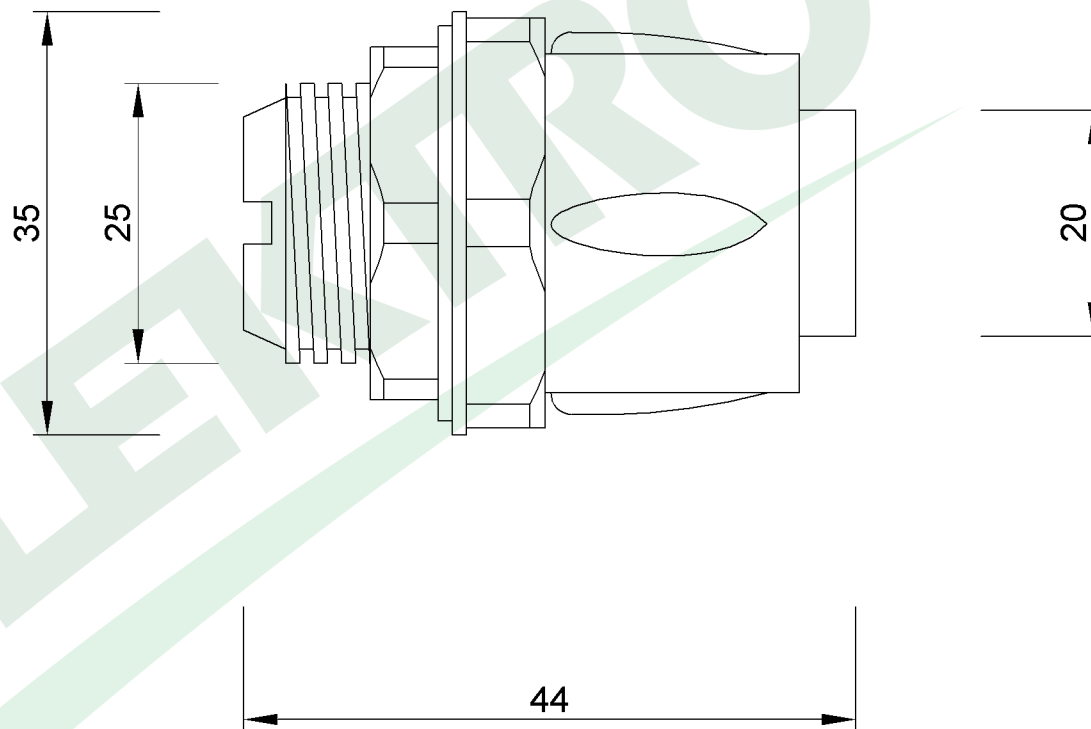


wymiary w [mm]
dimensions [mm]

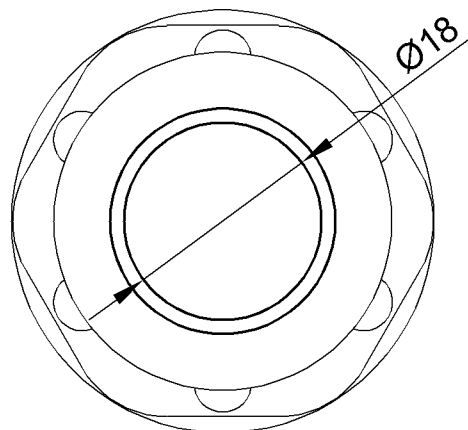

**PARAMETRY
PARAMETERS**

materiał
material

PVC

kolor
color

RAL 7035

stopień ochrony
international protection

IP65

odporność na UV
UV resistance

Tak
Yes

F6.0028

Dławik do rury elastycznej GUS Ø20 mm / MG25 szary IP65
Gland for flexible corrugated pipes Ø20 mm/MG25 grey IP65

F-ELEKTRO

www.f-elektro.com,

e-mail: info@f-elektro.com