
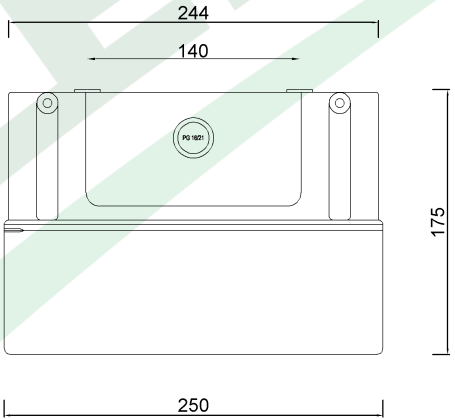
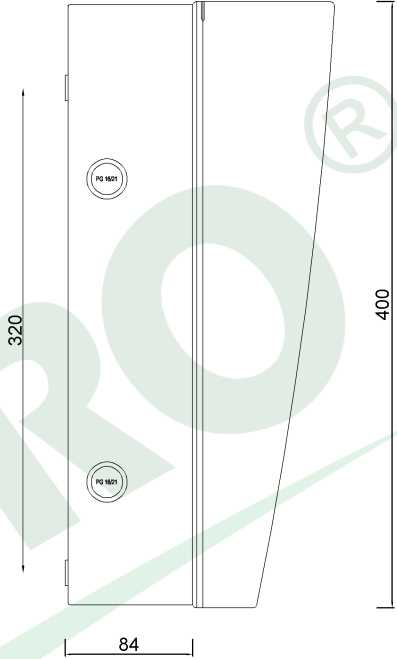


PARAMETRY PARAMETERS	
obudowa box	IP65
gniazda sockets	IP67
dławica cable gland	PG16
zaciski terminal	N i PE
OKABLOWANIE Sockets wiring	
32A/5p	4mm <sup>2</sup> H07V-K /LgY/ 450/750V
230V	1.5mm <sup>2</sup> H07V-K /LgY/ 450/750V

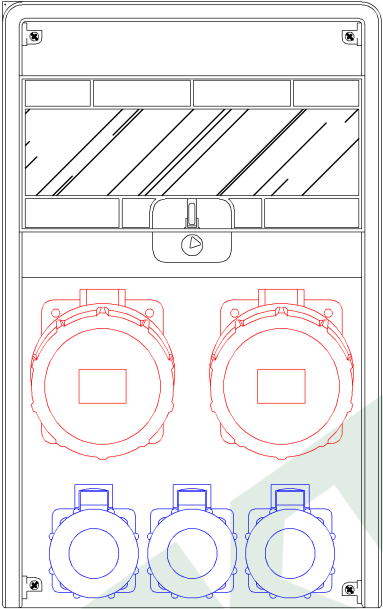

wymiary w [mm]  
dimensions [mm]

74185.4	Roz. ULISSE 12M 2x32/5, 3x230V IP65 Distribution box ULISSE 12M 2x32/5, 3x230V IP65
F-ELEKTRO www.f-elektro.com, e-mail: info@f-elektro.com	